



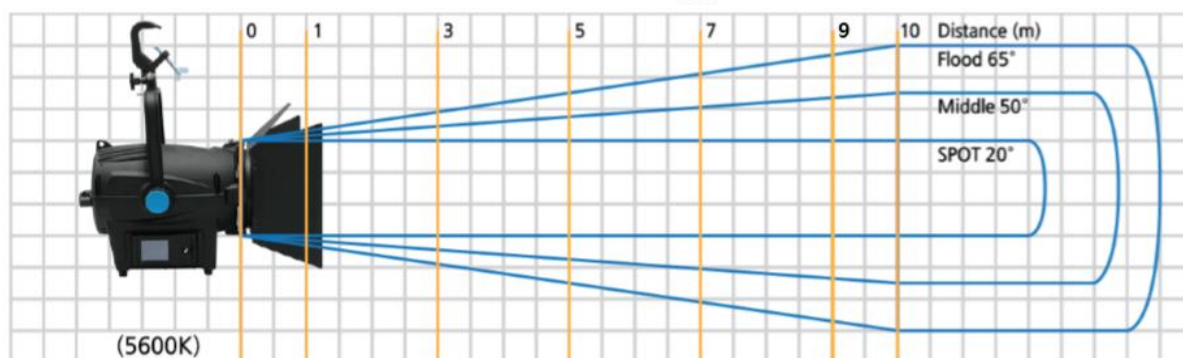


# ALPHA LITE SPOT LIGHT FS SERIES

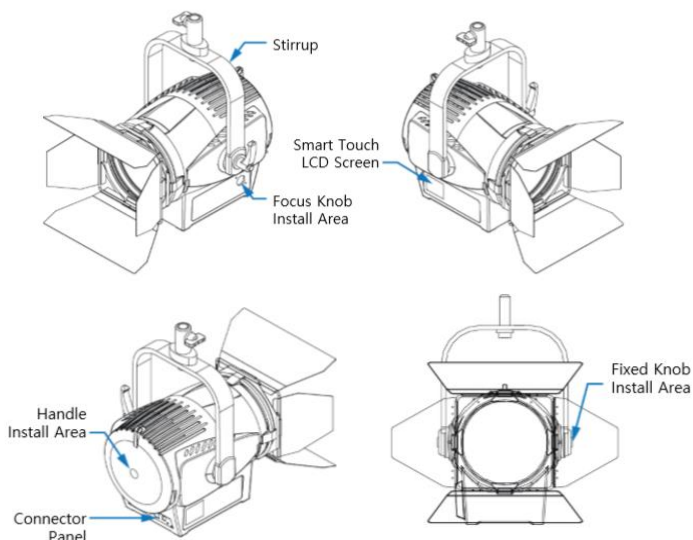


	0	1	3	5	7	9	10	Distance (m)
(5600K)								
FS1000 (50°)			844	331	178	110		Illuminance(lux)
FS1500 (50°)			1395	552	297	185		
FS2000 (50°)			1983	773	408	250		
FS3000 (50°)			2947	1163	615	391		
FS5000 (50°)			4130	1620	850	535		

	FS1000	FS1500	FS2000	FS3000	FS5000
Optical System	Focusable Fresnel Lens				
Lens Diameter	170mm / 7"	200mm / 8"		250mm / 10"	
Beam Angle	15° ~ 55° (Half Peak Angle)				
Weight (kg/lbs)	8.5 / 18.7	10 / 22		14 / 30.9	
Handling	Adjusting Sliding Stirrup, High Strength Tilt Lock				
Mounting	16mm / 28mm				
Tilt Angle	±270°				
Power Supply Range	AC 100-240V, 50/60Hz				
Power Consumption	180W	250W	350W	500W	650W
LED Chip	300W CSP LED	300W CSP LED	400W CSP LED	600W CSP LED	800W CSP LED
White Light (CCT)	Full 2,900~6,000K (VCT)				
CRI	95~98				
Dimming	0~100% 16-bit				
Control	5-PIN DMX In and Out, Smart Touch LCD Controller, RDM, (Option) Wireless DMX512, Wireless RDM				
Remote Device Management	Supported				
Ambient Temperature Operation	-20~45°C				
IP Rating	IP20				
Estimated LED Lifetime	Over 50,000 hours				

## Dimensions (FS1000)

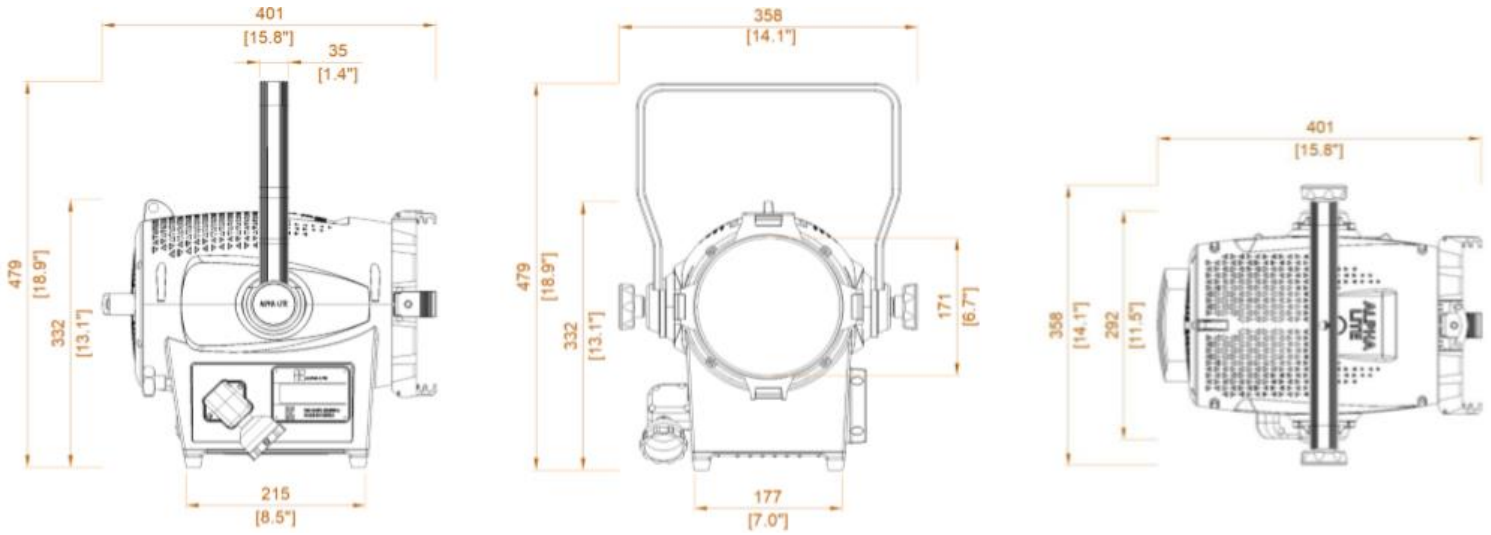

## Dimensions (FS1500 / FS2000)

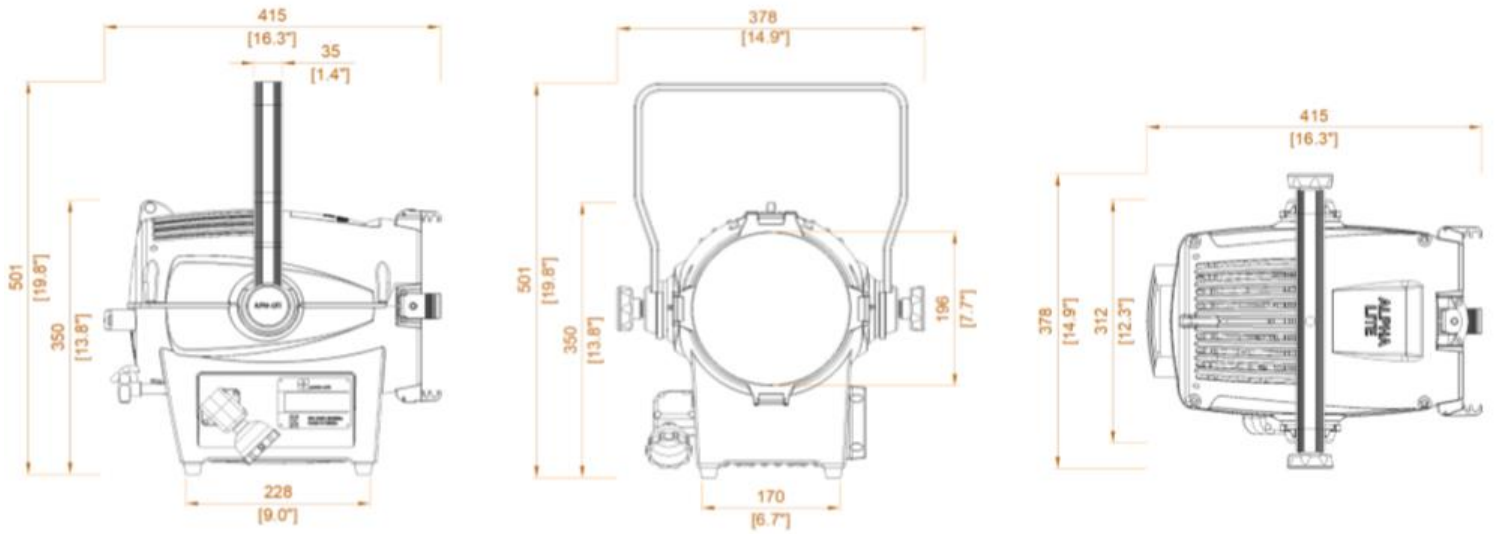

## Dimensions (FS300 / FS5000)

